



3D Dozer system

3D-MC²



Photos may include optional equipment.

Shatter the 3D automation production barrier-speed

- Increase speeds up to 200% over existing 3D systems.
- Smoothness and grading accuracy comparable to motor graders.
- Same easy-to-use interface as previous Topcon machine automation systems.
- Unmatched productivity that you will have to see to believe.

3D Dozer system 3D-MC²

Traditional finish grading with a dozer took multiple passes at slower speeds. Existing 3D-GPS machine control allowed operators to double their production. 3D-MC² uses revolutionary technology to reach an unbelievable new level of performance: four times faster than a standard dozer, two times faster than any 3Ddozer. One dozer doing the work of two 3D dozers, think of the money you will save!



The Topcon 3D-MC² advantage

- Fine grading with a dozer has been typically done in first gear. Not anymore. Now you can move more material at higher speeds and at a tighter accuracy with one machine. That's the Topcon advantage.



More efficient use of your machine


- 3D-MC² system will drastically change the role your dozer plays on a typical job site, in some cases it may even replace the need for a motor grader. It also means more efficient use of your dozer. Not only does speed increase, but fewer passes are needed, so more work can be done in less time. That means less machine operating time translating into less fuel, less wear on a machine and most importantly: more time that can be spent working in other areas or job sites.

Improved operator performance

- 3D-MC² is built on our same easy to use interface so your operators will have no problem putting it to work right away. With the advancements of 3D-MC², less experienced operators will be able to compete with the most skilled operators. More for less, what could be better?

How it works

- 3D-MC² utilizes the GX-55 control box, GNSS antenna, MC-R3 receiver, a single MC² sensor and intuitive software to deliver position updates 100 times per second. The MC² sensor combines a gyro, compass and inertial sensor to measure the X, Y and Z position as well as the roll, pitch, yaw and acceleration of the dozer. 3D-MC² is uniquely configured to deliver stability and control at any moment.

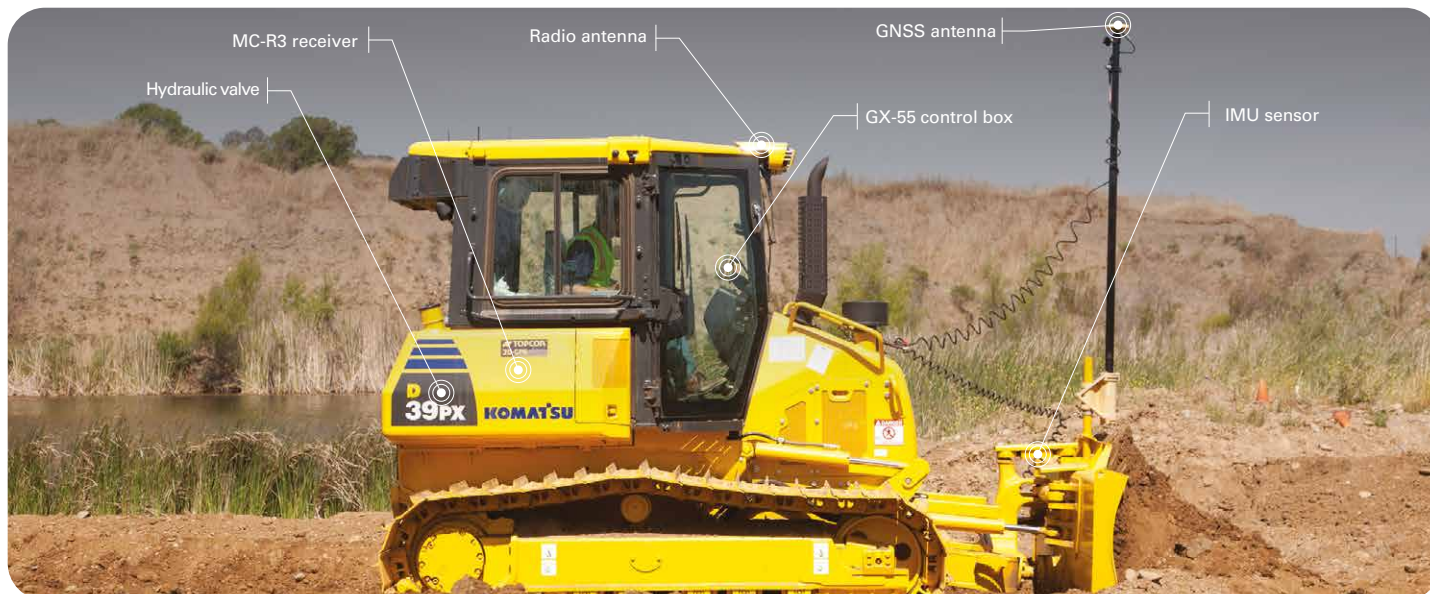



MC² IMU

Supply voltage	9 to 32 Vcc
Power input	0.21 A máx. a 12v 0.11 A máx. a 24v
Housing	Powder coated cast aluminum
Weight	1 kg
Operating temp.	-20 °C to 60 °C



Sensor features

- Rugged housing for OEM and aftermarket installations.
- 100 Hz position update rate.
- All electronic sensors for positioning calculations.

GX-55 Control box

Supply voltage	9 to 32 Vcc
Ports	2x USB Ethernet RS-232 2x CANBus 2x digital inputs
Display panel	640 x 480 color VGA, enhanced brightness with analog touchscreen
Operating system	Windows® CE
Operating temp.	-40 °C to 70 °C
Weight	1.26 kg with backpack 1 kg without backpack



Graphical user interface

- Windows CE®.
- Touch screen interface.
- Internal battery provides functionality away from the machine.
- Integrated LED lightbar.

MC-R3 receiver

Supply voltage	10 to 30 Vcc
GNSS	GPS, GLONASS, SBAS
Channels	144
Radio	GSM/CDMA/HSPA 915SS Digital UHFII
Ports	RS-485 RS-232 GMU 2x GNSS 2x millimeter GPS External modem 2x CAN 2x Ethernet I2C for Smart Knob™ SIM card (optional)
Shock	50G11ms1/2sine wave each axis
Dust/water rating	IP66



Communications receiver

- Network capable receiver with GSM / CDMA.
- UHF and Spread Spectrum radio options.
- LED indicators for satellite tracking and controller status.



Rugged design

- G3 tracking technology.
- Rugged housing design to work on any machine.
- Lightweight.

Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are Komatsu's standard written warranties, which will be furnished upon request.

Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu America Corp., Komatsu Mining Corp., or one of their affiliates, or the respective owners or licensees

KOMATSU

www.komatsulatioamerica.com

