



## JTHB70-3


Komatsu Hydraulic Breaker

### Sales features

- ✓ Simple design = lower operating costs.
- ✓ Only two moving parts.
- ✓ Accumulator free.
- ✓ Dual retainer pins.
- ✓ Powerful.
- ✓ Auto greasing system (optional).

### Specifications

| Model              | JTHB70-3  |       |
|--------------------|-----------|-------|
| Working weight     | 570       | kg    |
| Oil flow           | 45-80     | L/min |
| Operating pressure | 10-16     | Mpa   |
| Impact rate        | 550-1,000 | bpm   |
| Tool diameter      | 95        | mm    |
| Nose size          | 3/4       | inch  |
| N2 gas pressure    | 0.8       | Mpa   |
| Base machine       | 6-11      | ton   |

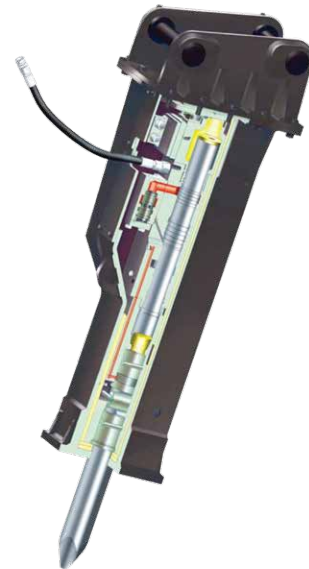

# Design concept

## Adaptable

---

- The Komatsu breakers are not sensitive to system back pressure and can be powered by a wide variety of carriers in the field.

## User friendly

---

- Using low pressure nitrogen charge, the Komatsu breaker cushions every blow.
- This reduces wear and tear on the carrier and adds to operator comfort.

## Low operating costs

---

- Featuring only two moving parts and few seals.
- Komatsu breakers offer more "operating-time" along with a simple in the field maintenance.
- When a repair is required the Komatsu breaker will be back on the job quickly and at a reasonable cost.

---

The product designs, specifications and information in this document are provided for informational purposes only and do not constitute warranties of any kind. Product designs and specifications may change at any time without prior notice. The only warranties that apply to the sale of products and services are Komatsu's standard written warranties, which will be provided upon request.

Komatsu and other trademarks used in this document are the property of Komatsu Ltd., Komatsu America Corp., Komatsu Mining Corp. or one of their subsidiaries, or their respective owners or licensees.

**KOMATSU**

[komatsulatioamerica.com](https://komatsulatioamerica.com)

