



JMHB360H-1


H-Series Hydraulic Breaker

Power and Versatility for All Jobsites

- ✓ Designed for 27 to 40 ton carriers.
- ✓ Maximum impact power from the very first blow.
- ✓ Demolition, quarry, mines and tunnels, mass excavation, landscaping, and recycling. A tool fitted for any situation.

- **Hydraulic accumulator:** No more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication** with 8 kg capacity, mounted on carrier machine.
- **Made in France:** Superior quality steel, and manufacturing excellence.
- **Dynamic energy adjustment:** Two blowing speeds automatically adjusted.
- **Blank firing protection:** Increased lifespan of wear parts.

Weight and dimensions

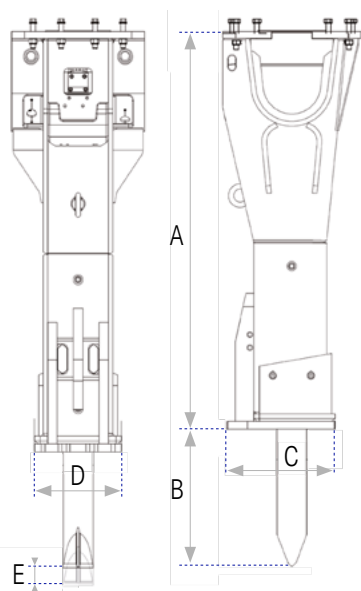

Weight		
Breaker.	2,185 kg.	4,817 lb.
+ Mounted tool.	2.39 kg.	5,269 lb.
+ Mounted adapter plate (max.)	2,866 kg.	6,318 lb.
Dimensions		
A.	2,124 mm.	83.6 in.
B.	585 mm.	23.03 in.
C.	575 mm.	23 in.
D.	463 mm.	18.22 in.
E.	100 mm.	3.93 in.

General Specifications

Operating Information

- **Carrier weight range (min-max, mt):** 27-40
- **Oil flow (min.max, L/min, gpm):** 185-250/46.3-66.1
- **Maximum operating pressure (bar/psi):** 155/2,248
- **Maximum back pressure (bar/psi):** 25/363
- **Input power (kW):** 64.6
- **Striking frequency (min-max, BPM):** 320-560
- **Noise level/10 m (dBA):** 120
- **Automatic lubrication:** Standard.
- **Soundproofing:** Standard.
- **Inspection kit:** Standard.
- **Pressurization:** Preinstalled.

Consumables (SKU)

- **Grease cartridge (5 kg):** 86772993
- **ABL2 grease bucket (24 kg):** 86772969
- **ABLF grease bucket (24 kg):** 86772977

Options (SKU)

- **Pressurization kit:** 86372505
- **Softstart:** 86778792
- **Adapter plate:** Upon request.
- **Special painting:** Upon request.

Maintenance kits

- **Basic:** 86781135
- **Level 1:** 86785243
- **Level 2:** 86785250

Tools			
Diameter (mm/in).	160/6.29	160/6.29	160/6.29
Length (mm/in).	1,350/53	1,350/53	1,350/53
Weight.	194/428	195/430	205/452
SKU.	86780046	86780038	86780053

The designs, specifications and product information in this document are provided only for informative purposes and constitute no warranty whatsoever. Product designs and specifications may change at any time without notice. The only warranties applicable to products and service sales are the standard written warranties, provided by Komatsu upon request.

Komatsu and other brands used in this document are property of Komatsu Ltd., Komatsu America Corp., Komatsu Mining Corp., one of their subsidiaries, or their respective owners or licensees.

KOMATSU

komatsulatioamerica.com

