



JMHB220H-1


H-Series Hydraulic Breaker

Power and Versatility for All Jobsites

- ✓ Designed for 20 to 35 ton carriers.
- ✓ Maximum impact power from the very first blow.
- ✓ Demolition, quarry, mines and tunnels, mass excavation, landscaping, and recycling. A tool fitted for any situation.

- **Hydraulic accumulator:** No more regular nitrogen controls and recharges on jobsites.
- **Automatic lubrication** with 8 kg capacity, mounted on carrier machine.
- **Made in France:** Superior quality steel, and manufacturing excellence.
- **Dynamic energy adjustment:** Two blowing speeds automatically adjusted.
- **Blank firing protection:** Increased lifespan of wear parts.

Weight and dimensions

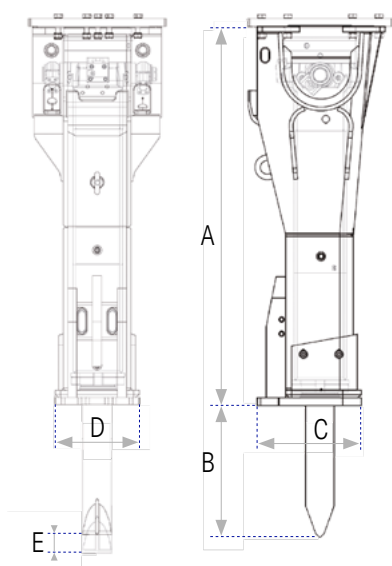

Weight		
Breaker.	1,612 kg.	3,554 lb.
+ Mounted tool.	1,763 kg.	3,887 lb.
+ Mounted adapter plate (max.)	2,139 kg.	4,716 lb.
Dimensions		
A.	1,938 mm.	76.2 in.
B.	620 mm.	24 in.
C.	530 mm.	21 in.
D.	408 mm.	16 in.
E.	90 mm.	3.54 in.

General Specifications

Operating Information

- **Carrier weight range (min-max, mt):** 20-35
- **Oil flow (min.max, L/min, gpm):** 140-220/37-58,2
- **Maximum operating pressure (bar/psi):** 165/2,393
- **Maximum back pressure (bar/psi):** 30/435
- **Input power (kW):** 60.5
- **Striking frequency (min-max, BPM):** 320-720
- **Noise level/10 m (dBA):** 90
- **Automatic lubrication:** Standard.
- **Soundproofing:** Standard.
- **Inspection kit:** Standard.
- **Pressurization:** Preinstalled.

Consumables (SKU)

- **Grease cartridge (5 kg):** 86772993
- **ABL2 grease bucket (24 kg):** 86772969
- **ABLF grease bucket (24 kg):** 86772977

Options (SKU)

- **Pressurization kit:** 86372505
- **Softstart:** 86778784
- **Adapter plate:** Upon request
- **Special painting:** Upon request

Maintenance kits

- **Basic:** 86785243
- **Level 1:** 86785250
- **Level 2:** 86785268

Tools			
Diameter (mm/in).	140/5.5	140/5.5	140/5.5
Length (mm/in).	1,300/51	1,300/51	1,300/51
Weight.	144/317	146/322	151/333
SKU.	86657939	86657921	86671641

The designs, specifications and product information in this document are provided only for informative purposes and constitute no warranty whatsoever. Product designs and specifications may change at any time without notice. The only warranties applicable to products and service sales are the standard written warranties, provided by Komatsu upon request.

Komatsu and other brands used in this document are property of Komatsu Ltd., Komatsu America Corp., Komatsu Mining Corp., one of their subsidiaries, or their respective owners or licensees.

KOMATSU

komatsulatioamerica.com

