

KOMATSU®

OFF-HIGHWAY TRUCK

HD465-7E0

ECOT 3

GROSS HORSEPOWER

· 551 kW / 739 hp.

NET HORSEPOWER

· 533 kW / 715 hp.

MAXIMUM GVW

· 99,680 kg. / 219,760 lb.



Photos of the equipment are referential, may include optional equipment.

HD465-7E0

WALK-AROUND

**ENGINE
POWER
739 hp.**



Machine shown may include optional equipment.

PRODUCTIVITY FEATURES

- High performance Komatsu SAA6D170E-5 engine net. horsepower 533 kW. / 715 hp.
- Mode selection system (variable horsepower control in economy mode)
- Automatic idling setting system (AISS).
- Automatic retard speed control (ARSC).
- 7-speed, fully automatic K-ATOMICS transmission.
- Fully hydraulic controlled wet multiple-disc continuous brakes and retarder
- Retarder absorbing capacity (Continuous descent) 785 kW. / 1,052 hp.
- Long wheelbase and wide tread.
- Large high strength body
Heaped capacity 34.2 m³. / 44.7 yd³.
- Small turning radius 8.5 m. / 27'11".
- Paylord meter (PLM) (option).



HARMONY WITH ENVIRONMENT

- Komatsu SAA6D170E-5 engine is EPA Tier 3 and EU Stage 3A emissions certified.
- Low operation noise.
- Lead-free radiator.
- Brake cooling oil recovery tank.

RELIABILITY FEATURES

- Komatsu components.
- High-rigidity frame.
- Rigorous dump body design.
- Reliable hydraulic system.
- Flat face-to-face O-ring seals.
- Sealed DT connectors.
- Antilock Brake System (ABS) (option).
- Automatic spin regulator (ASR) (option).
- Pedal-operated secondary brake.

OPERATOR ENVIRONMENT

- Wide, spacious cab with excellent visibility.
- Ergonomically designed cab.
- Easy-to-see instrument panel.
- Ideal driving position settings.
- K-ATOMiCS with "Skip-Shift" function.
- Hydropneumatic suspension.
- Built-in ROPS/FOPS cab.
- Viscous cab mounts.
- Electric body dump control.
- Supplementary steering and secondary brake.
- Three-mode hydropneumatic suspension (automatic suspension) (option).

EASY MAINTENANCE

- Advanced monitoring system.
- Wet multiple-disc brakes and fully hydraulic controlled braking system.
- Extended oil change interval.
- Centralized arrangement of filters.
- Disc wheels (flange type rims).
- Electric circuit breaker.
- Centralized greasing points.
- Vehicle health monitoring system (VHMS) (option).

PRODUCTIVITY FEATURES

» **Komatsu technology**

ecot3

ecology and economy – technology 3

» Komatsu develops and produces all major components, such as engines, electronics and hydraulic components, in house. With this “Komatsu Technology,” and adding customer feedback, Komatsu is achieving greater advancements in technology. To achieve both high levels of productivity and economical performance, Komatsu has developed the main components with a total control system. The result is a new generation of high performance and environment friendly machines.

» **High performance Komatsu SAA6D170E-5 engine**

» This engine delivers faster acceleration and higher travel speeds with high horsepower per ton. Advanced technology, such as Common Rail Injection system (CRI), air to air aftercooler, efficient turbo-charger, and heavy duty cooled EGR enables the engine to be EPA Tier 3 and EU Stage 3A emissions certified. High torque at low speed, impressive acceleration, and low fuel consumption ensure maximum productivity.

» **Mode selection system**

» The system allows selection of the appropriate mode between two modes <Power mode> or <Economy mode> according to each working condition. The mode is easily selected with a switch in the operator's cab.

» **Power mode.** Great productivity can be attained by taking full advantage of high output power. It is appropriate for job sites where larger production uphill-hauling is required.

» **Economy mode (variable horsepower control).** The engine power automatically changes depending on loaded or unloaded conditions always to use an optimum speed gear. It is appropriate for light work on flat ground.

» **Automatic idling setting system (AISS)**

» This system facilitates quick engine warm-up and cab cooling / warming. When setting the system ON, engine idle speed is kept at 945 rpm. when coolant temperature is 50°C / 122°F or lower. Speed automatically returns to 750 rpm. when coolant temperature reaches 50°C / 122°F.



» **7-speed, fully automatic K-ATOMiCS transmission**

» The K-ATOMiCS (Komatsu advanced transmission with optimum modulation control system) automatically selects the optimum gear according to vehicle speed, engine speed and the shift position you've chosen. The result: the best gear for any driving situation.



» **Auto retard speed control (ARSC) (option)**


» ARSC allows the operator to simply set the downhill travel speed and go down slopes at a constant speed. As a result, the operator can concentrate on steering. The speed can be set at increments of 1 km./h. / 0.6 mph. per click (±5 km/h. / 3.1 mph. of setting speed adjustment) to match the optimum speed for the slope. Also, since the retarder cooling oil temperature is always monitored, the speed is automatically lowered.



» **Hydraulically controlled wet multiple-disc brakes and retarder**


» Wet multiple-disc brakes ensures highly reliable and stable brake performance. The large-capacity, continuously cooled, wet multiple-disc brakes also function as a highly responsive retarder which gives the operator greater confidence at higher speeds when travelling downhill.

- Retarder absorbing capacity (continuous descent): 785 kW. / 1,052 hp.
- Brake surface area (rear): 64,230 cm². / 9,956 in².

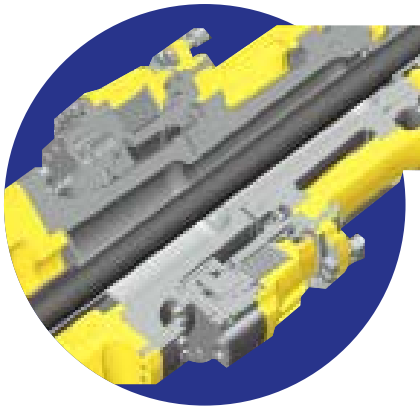

» **Small turning radius**

» The MacPherson strut type front suspension has a special A-frame between each wheel and the main frame. The wider space created between the front wheels and the main frame increases the turning angle of the wheels. The larger this turning angle, the smaller the turning radius of the truck.

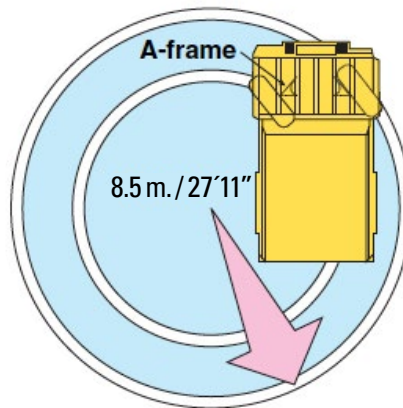

» **Payload meter (PLM) (option)**

» PLM allows the production volume and the working conditions of the dump truck to be analyzed directly via a personal computer (PC). The PLM data can be downloaded directly from HD465-7E0 to your PC by connecting the cable. The loaded weight is indicated on the payload display (character display) and the external display lamp while loading.

» **Long wheelbase and wide tread**

» With an extra-long wheelbase, a wide tread and an exceptionally low center of gravity, the HD465-7 hauls the load at higher speed for greater productivity, and delivers superior driving comfort over rough terrain.

» **Large body**

» A wide target area makes for easy loading with minimal soil spillage and more efficient hauling. The V-shape design also increases structural strength, and provides excellent load stability.



OPERATOR ENVIRONMENT

» Wide, spacious cab with excellent visibility

» Wide windows in the front, side and back, plus plenty of space in the richly upholstered interior, provide quiet, comfortable environment from which to see and control every aspect of operation. Front under view mirrors and side under view mirrors have been added to improve safety.

» Ergonomically designed cab

» The ergonomically designed operator's compartment makes it very easy and comfortable for the operator to use all the controls. The result is more confident operation and greater productivity.

» Easy-to-See instrument panel

» The instrument panel makes it easy to monitor critical machine functions. In addition, a caution light warns the operator of any problems that may occur. Problems are recorded in the monitor and indicated as service codes. This makes the machine user friendly and easy to service.


» Ideal driving position settings

» The 5-way adjustable operator seat and the tilt-telescopic steering column provide an optimum driving posture, for increased driving comfort and more control over machine operation. The suspension seat dampens vibrations transmitted from the machine and reduces operator fatigue as well as holding the operator securely to assure confident operation 78 mm. / 3" width seat belt is provided as standard equipment.



» Hydropneumatic suspension for all terrains

» The hydropneumatic suspension assures a comfortable ride even over rough terrain and ensures maximum productivity and operator confidence.




» **K-ATOMiCS with “Skip-Shift” function**

» An electronically controlled valve is provided for each clutch pack in the transmission for independent clutch engagement/disengagement. It enables an ideal change in clutch modulation pressure and torque cut-off timing in response to travel conditions. This system and newly added “skip-shift” function ensure smooth shifting and responsive acceleration.

“Skip-Shift” function

Optimum travel speed automatically selected in response to angle of ascent. Reduced frequency of downshift and smoother operation are provided.

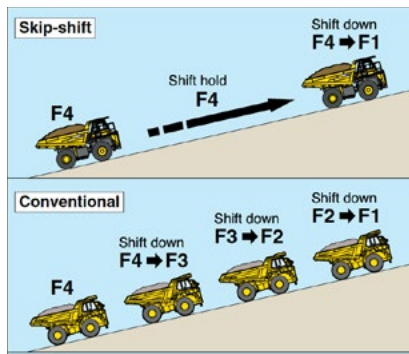

» **Three-mode hydropneumatic suspension (automatic suspension) (option)**

» Suspension mode is automatically switched to one of three stages (soft, medium and hard) according to load and operating conditions, for a more comfortable and stable ride.


» **Built-in ROPS/FOPS cab**

» These structures conform to ISO3471 ROPS standard, and ISO 3449 FOPS standard.



» **Viscous cab mounts**

» Viscous mounts reduce the noise transmitted to the cab and achieve a quiet 77 db. (A). noise level.



» **Electric body dump control**

» The low effort lever makes dumping easy. A positioning sensor is installed for dump body control which significantly reduces the shock made by the lowering of the dump body.



» **Supplementary steering and secondary brake**

» Supplementary steering and secondary brakes are standard features.

- Steering: ISO 5010, SAE J1511.
- Brakes: ISO 3450.



RELIABILITY FEATURES

» Komatsu components

» Komatsu manufactures the engine, torque converter, transmission, hydraulic units, and electrical parts on this dump truck. Komatsu dump trucks are manufactured with an integrated production system under strict quality control system guidelines.

» High-rigidity frame

» Cast-steel components are used in the main frame for highstress areas where loads and shocks are most concentrated.



» Rigorous dump body design

» The body is built of 130 kg/mm² 184,900 PSI wear-resistant high-tensile steel with a Brinell hardness of 400. The V-shape and V-bottom design also increase structural strength. The side and bottom plates of the dump section are reinforced with ribs for added strength.




» Reliable hydraulic system

» The oil cooler is installed in the radiator lower tank, improving the reliability of the hydraulic system during sudden temperature rises. Further, in addition to the main filter, a 25-micron line filter is at the entrance to the transmission control valve. This system helps to prevent secondary faults.


» Flat face-to-face O-ring seals

» Flat face-to-face O-ring seals are used to securely seal all hydraulic hose connections and to prevent oil leakage.

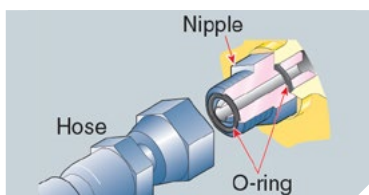

» Sealed DT connectors

» Main harnesses and controller connectors are equipped with sealed DT connectors providing high reliability, water resistance and dust resistance.



» Antilock braking system (ABS) (option)

» Using its outstanding electronics technology, Komatsu is the first in the industry to introduce ABS on construction machinery. This system prevents the tires from locking, thus minimizes skidding under slippery conditions while applying the service brake.

» Automatic spin regulator (ASR) (option)

» ASR automatically prevents the rear tires on either side from slipping on soft ground for optimal traction.

» Pedal-operated secondary brake

» If there should be a failure in the foot brake, the parking brake and front disc brakes are activated as a pedal operated secondary brake. In addition, when hydraulic pressure drops below the rated level, the parking brake is automatically actuated.



» Lead-free radiator

» In addition to compliance with emission regulations, a leadfree aluminum core is used for the radiator to meet with global environmental requirements.

» Brake cooling oil recovery tank

» To protect the environment, a tank is installed to recover brake cooling oil in the event of brake floating seal leakage.

Protection functions supported by electronic control

Item	Function
Downshift inhibitor	Even if the driver downshifts accidentally, a speed appropriate to the current gear is automatically set, preventing over-runs.
Over run inhibitor	When descending grades, if the vehicle's speed surpasses the maximum for the current gear, the rear brakes automatically operate, preventing over-runs.
Reverse inhibitor	The vehicle is prevented from moving backward when operating the body.
Forward / Reverse shift inhibitor	This device makes it impossible to shift from forward to reverse when the vehicle's speed surpasses 4 km/hour.
Anti-hunting system	When running near a shift point, smooth automatic shifting takes place.
Neutral safety	The engine is prevented from starting when the shift lever is not in neutral.

EASY MAINTENANCE

» Advanced monitoring system

» The Komatsu advanced monitoring system identifies maintenance items, reduces diagnostic times, indicates oil and filter replacement hours and displays abnormality codes. This monitor system helps to maximize machine production time.



» Wet multiple-disc brakes and fully hydraulic controlled braking systems

» Realize lower maintenance costs and higher reliability. Wet disc brakes are fully sealed to keep contaminants out, reducing wear and maintenance. Brakes require no adjustments for wear, meaning even lower maintenance. Added reliability is designed into the braking system by the use of three independent hydraulic circuits providing hydraulic backup should one of the circuits fail. Fully hydraulic braking systems eliminate the air system so air bleeding is not required, and water condensation that can lead to contamination, corrosion and freezing is eliminated.

» Extended oil change intervals

» In order to minimize operating costs, oil change intervals have been extended:

- Engine oil 500 hours.
- Hydraulic oil 4,000 hours.

» Centralized arrangement of filters

» The filters are centralized so that they can be serviced easily.




» Centralized greasing points (option)

» Greasing points are centralized at three locations, it enables to approach from ground level.



» Vehicle health monitoring system (VHMS) (option)

» VHMS controller monitors the health conditions of major components, enables remote analysis of the machine and its operation. This process is supported by the Komatsu distributors, factory and design team. This contributes to reduced repair costs and to maintaining maximum availability.

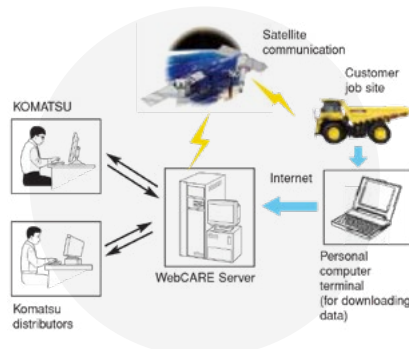

» Disc wheels (flanges type rims)

» Disc wheels (flange type rims) provide easy removal/installation for the tires.



» Electric circuit breaker

» A circuit breaker is adopted in important electric circuits that should be restored in a short time when a problem occurs in the electrical system.



SPECIFICATIONS



ENGINE

MODEL	Komatsu SAA6D170E-5.
TYPE	Water-cooled, 4-cycle.
ASPIRATION	Turbo-charged, air-to-air after-cooled, cooled EGR.
N° OF CYLINDERS	6
BORE X STROKE	170 mm. x 170 mm. 6.69" x 6.69"
PISTON DISPLACEMENT	23.15 ltr. / 1,413 in3.
HORSEPOWER	SAE J1995 Gross 551 kW. / 739 hp.
ISO 9249 / SAE J 1349	Net 533 kW. / 715 hp.
RATED RPM.	2,000 rpm.
FAN DRIVE TYPE	Mechanical.
MAXIMUM TORQUE	339 kg-m 2,452 lb. ft.
FUEL SYSTEM	Direct injection.
GOVERNOR	Electronically controlled.
LUBRICATION SYSTEM	
METHOD	Gear pump, force-lubrication. Full-flow type.
FILTER	
AIR CLEANER	Dry type with double elements and precleaner, plus dust indicator.
EPA Tire 3 and EU Stage 3A emissions certified.	



TRANSMISSION

TORQUE CONVERTER	3-elements, 1-stage, 2-phase.
TRANSMISSION	Full-automatic, planetary type.
SPEED RANGE	7 speeds forward and 1 reverse.
LOCKUP CLUTCH	Wet, multiple-disc clutch.
FORWARD	Torque converter drive in 1st gear, direct drive in 1st lockup and all higher gears.
REVERSE	Torque converter drive.
SHIFT CONTROL	Electronic shift control with automatic clutch modulation in all gear.
MAXIMUM TRAVEL SPEED	70 km/h. / 43.5 mph.



AXLES

REAR AXLE	Full-floating.
FINAL DRIVE TYPE	Planetary gear.
RATIOS:	
DIFFERENTIAL	3.54
PLANETARY	4.74



SUSPENSION SYSTEM

Independent, hydropneumatic suspension cylinder with fixed throttle To dampen vibration.

EFFECTIVE CYLINDER STROKE (FRONT SUSPENSION)	303 mm. / 11.9"
REAR AXLE OSCILLATION:	
OIL STOPPER	6.8°
MECHANICAL STOPPER	7.7°



STEERING SYSTEM

TYPE	Fully hydraulic power steering with two double-acting cylinders.
SUPPLEMENTARY STEERING	Manual control (meets ISO 5010 and SAE J1511)
MINIMUM TURNING RADIUS.	8.5 m. / 27'11"
MAXIMUM STEERING ANGLE	39°



TIRES

STANDARD TIRE 24.00-35-36PR



CAB

Dimensions comply with ISO 3471 ROPS (roll-over protective structure) standard, and ISO 3449 FOPS standard.



MAIN FRAME

TYPE Box-sectioned structure.



BRAKES

BRAKES MEET ISO 3450 STANDARD.

SERVICE BRAKES:	
FRONT	Fully hydraulic control, caliper disc type.
REAR	Fully hydraulic, oil-cooled, multiple-disc type.
PARKING BRAKE	Spring applied, caliper disc type.
RETARDER	Oil-cooled, multiple-disc rear brakes act as retarder.
SECONDARY BRAKE	Manual pedal operation. When hydraulic pressure drops below the rated level, parking brake is automatically actuated.
BRAKE SURFACE	
FRONT	1,936 cm2. / 300 in2.
REAR	64,230 cm2. / 9,956 in2.



BODY

CAPACITY:	
STRUCK	25.0 m3. / 32.7 yd3.
HEAPED (2:1, SAE)	34.2 m3. / 44.7 yd3.
PAYLOAD	55 metric / tons 61 U.S. tons.
MATERIAL	130 kg/mm2. / 184,900 PSI high tensile strength steel.
STRUCTURE	V-shape body with V-bottom.
MATERIAL THICKNESS:	
BOTTOM	19 mm. / 0.75"
FRONT	12 mm. / 0.47"
SIDES	9 mm. / 0.35"
TARGET AREA (INSIDE LENGTH X WIDTH)	6,450 mm. x 3,870 mm. / 21'2" x 12'28"
DUMPING ANGLE	48°
HEIGHT AT FULL DUMP	8,800 mm. / 28'10"
HEATING	Exhaust heating.



HYDRAULIC SYSTEM

HOIST CYLINDER	Twin, 2-stage telescopic type.
RELIEF PRESSURE	20.6 MPa / 210 kg/cm2. / 2,990 PSI
HOIST TIME	11.5 sec.



WEIGHT (APPROXIMATE)

EMPTY WEIGHT	43,100 kg. / 95,020 lb.
MAX. GROSS VEHICLE WEIGHT	99,680 kg. / 219,760 lb.
NOT TO EXCEED MAX. GROSS VEHICLE WEIGHT, INCLUDING OPTIONS, FUEL AND PAYLOAD.	
WEIGHT DISTRIBUTION:	
EMPTY: FRONT AXLE	47%
REAR AXLE	53%
LOADED: FRONT AXLE	32%
REAR AXLE	68%




SERVICE REFILL CAPACITIES

FUEL TANK	780 ltr. / 206.1 U.S. Gal.
ENGINE OIL	80 ltr. / 21.1 U.S. Gal.
TORQUE CONVERTER, TRANSMISSION AND RETARDER COOLING	215 ltr. / 56.8 U.S. Gal.
DIFFERENTIAL	95 ltr. / 25.1 U.S. Gal.
FINAL DRIVES (TOTAL)	42 ltr. / 11.1 U.S. Gal.
HYDRAULIC SYSTEM	122 ltr. / 32.2 U.S. Gal.
SUSPENSION (TOTAL)	55.6 ltr. / 14.7 U.S. Gal.




DIMENSIONS

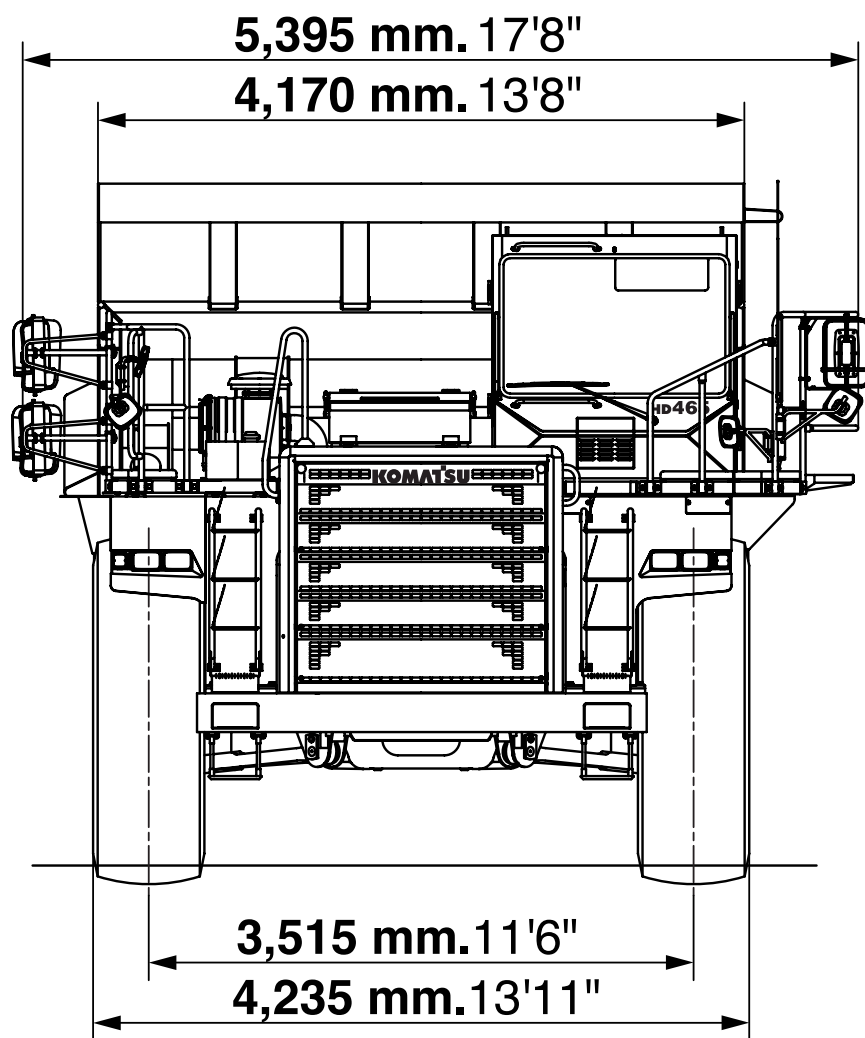



DIMENSIONS

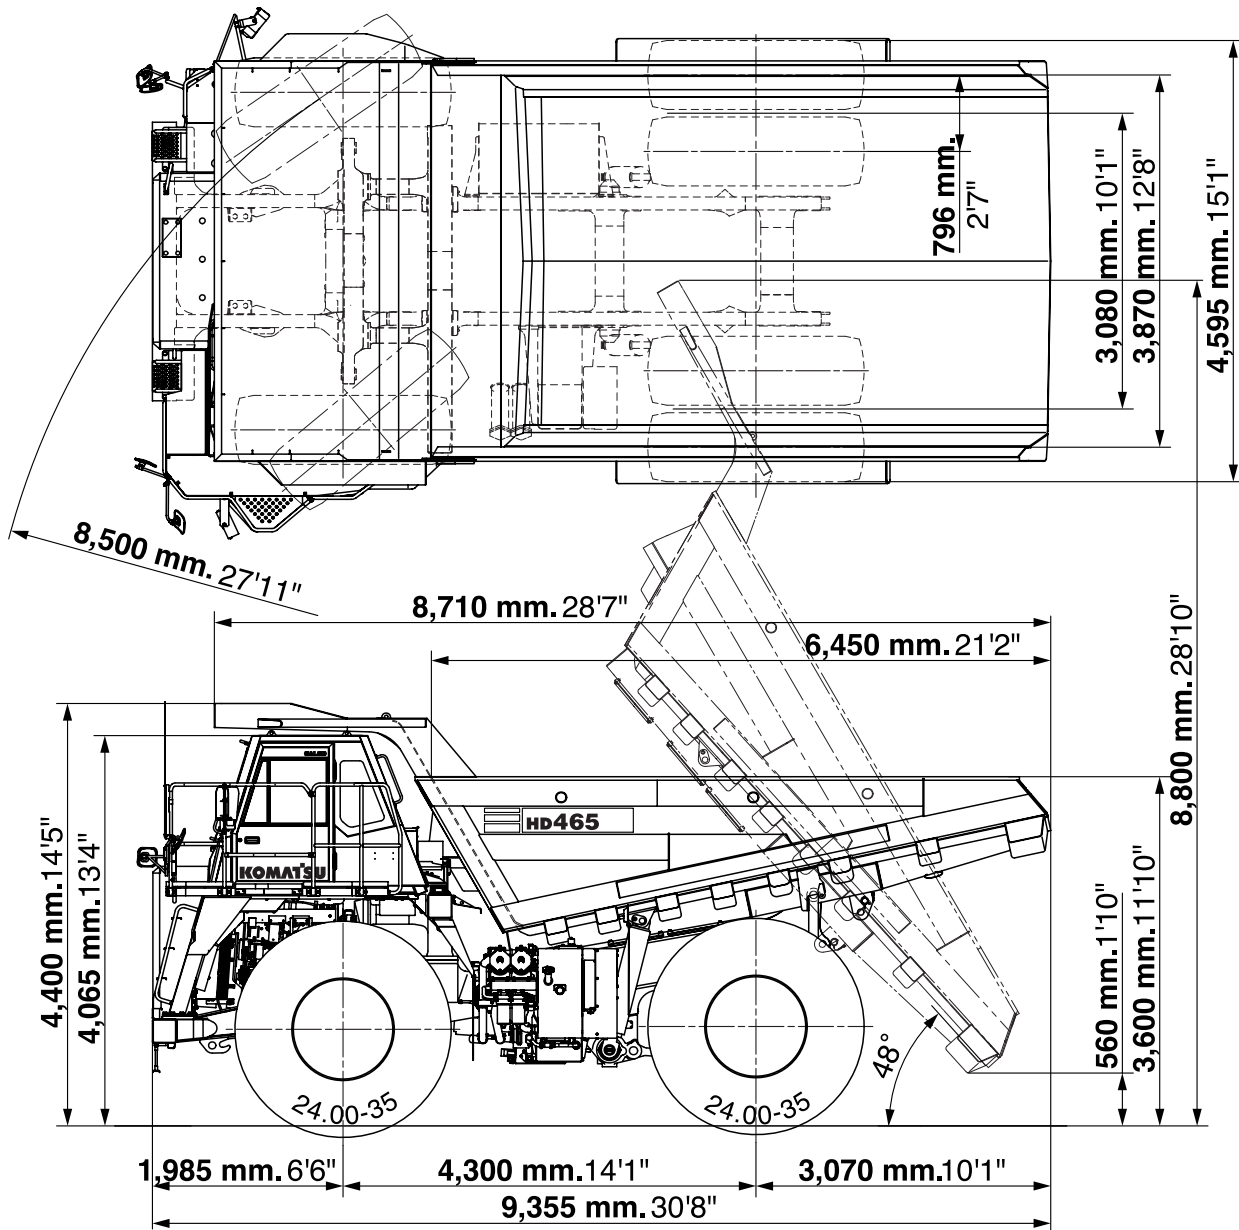




DIMENSIONS

» TRAVEL PERFORMANCE


» To determine travel performance: Read from gross weight down to the percent of total resistance. From this weight-resistance point, read horizontally to the curve with the highest obtainable speed range, then down to maximum speed. Usable rimpull depends upon traction available and weight on drive wheels.

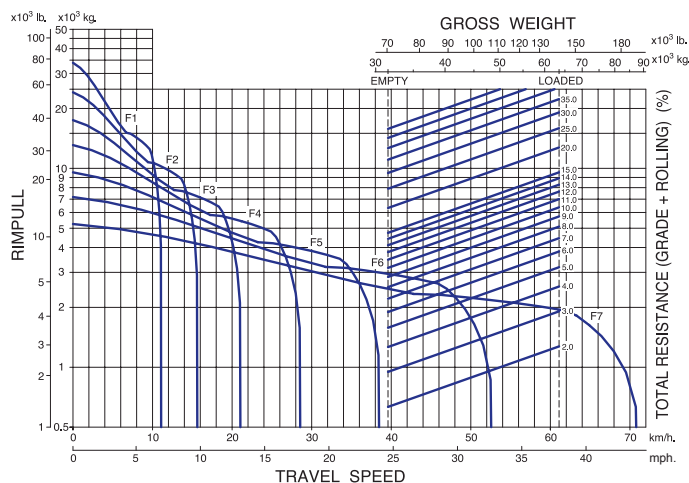


» BRAKE PERFORMANCE

» To determine brake performance: These curves are provided to establish the maximum speed and gearshift position for safer descents on roads with a given distance. Read from gross weight down to the percent of total resistance. From this weight resistance point, read horizontally to the curve with the highest obtainable speed range, then down to maximum descent speed the brakes can safely handle without exceeding cooling capacity.

Grade distance: Continuous descent

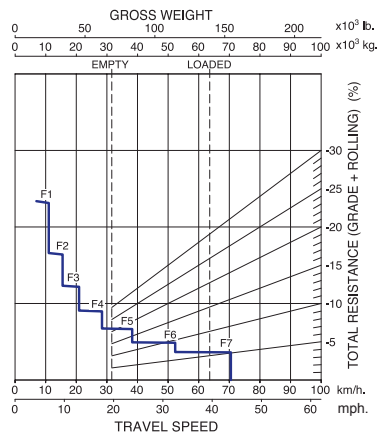

Grade distance: 450 m. (1,480 ft.)

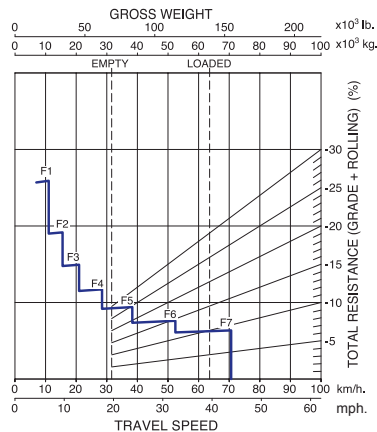



STANDARD EQUIPMENT FOR BASE MACHINE

ENGINE:

- Automatic idling setting system (AISS).
- Alternator, 90A/24V.
- Batteries, 2 x 12V/200Ah.
- Engine, Komatsu SAA6D170E-5.
- Mode selection system.
- Starting motor, 2 x 7.5 kW.

CAB:

- Ashtray.
- Cigarette lighter.
- Cup holder.
- Electronic dump control system.
- Electronic maintenance display/monitoring system.
- Operator seat, reclining, suspension type.
- Passenger seat with retractable seat belt.
- Power window (LH).
- ROPS cab with FOPS, sound suppression type.
- Seat belt for operator seat, 75 mm 3" width, retractable, 2-point.
- Space for lunch box
- Steering wheel, tilt and telescopic

- Sunvisor
- Laminated glass, front
- Two doors, left and right
- Windshield washer and wiper (with intermittent feature)

BODY:

- Body exhaust heating.
- Cab guard, left side.
- Spill guard, 150mm 6".

LIGHTING SYSTEM:

- Back-up light.
- Hazard lights.
- Headlights with dimmer switch.
- Indicator, stop and tail lights.

GUARD AND COVERS:

- Exhaust thermal guard.
- Fire protective covers.
- Drive shaft guard (front and rear).

SAFETY EQUIPMENT:

- Alarm, backup.
- Automatic retard speed control (ARSC).
- Coolant temperature alarm and light.
- Front brake cut-off system.
- Hand rails for platform.
- Horn, electric.
- Ladders, left and right hand sides.
- Overrun warning system.
- Rearview mirrors and under view mirrors.
- Supplementary steering.

OTHER:

- Centralized greasing.
- Electric circuit breaker, 24V.
- Mud guards.

TIRES:

- 24.00-35-36PR.



OPTIONAL EQUIPMENT

CAB:

- Air conditioner.
- Operator seat, air suspension type.
- Radio, AM/FM with cassette.
- Seat belt for operator seat, 50 mm 2" width, retractable, 3-point.
- Sunvisor, additional.
- Power window (R.H.).

BODY:

- Body liners.
- Platform guard, right hand side.
- Rock body.
- Upper side extension, 200 mm 8".
- Without body heating (with muffler).

LIGHTING SYSTEM:

- Back work lights, left and right sides.
- Fog lights.
- Yellow beacon.

TIRES:

- 24.00 R35.

SAFETY:

- Antilock brake system (ABC).
- Automatic spin regulator (ASR).
- Automatic supplementary steering.
- Rear view camera and monitor.

ARRANGEMENT:

- Batteries for cold area arrangement.
- Cold area arrangement.
- Sandy and dusty area arrangement.

OTHER:

- Auto-greasing system.
- Engine coolant heater.
- Engine oil pan heater.
- Engine side cover.
- Engine underguard.
- Fire extinguisher.
- Fuel quick charge.

- Payload meter.
- Muffler (no body heating type).
- Radiator shutter, canvas type.
- Spare parts for first service.
- Three-mode hydropneumatic suspension.
- Tool kit.
- Transmission underguard.
- Vandalism protection.
- Vehicle health monitoring system (VHMS).
- VHMS with satellite communication kit.

Please consult your Komatsu distributor for technical factibility and for detailed information.

KOMTRAX Plus



SATELLITE MONITORING SYSTEM

KOMTRAX PLUS is a revolutionary tracking system designed to save time and money. Nowadays, the equipment can be tracked anytime and anywhere. This valuable data, received via the KOMTRAX website, can be used to optimize planning of the movements and performance of the equipment.

CHARACTERISTICS

» ANOMALY CODES

Display of the fault codes presented in the equipment on a daily and monthly basis.

» TRENDS

Time-graftable curves to evaluate the condition of major components such as engine, transmissions, torque converter, propulsion system, etc.

» CHARGE METER

Payload meter (PLM), with the detail of each load cycle indicating the total of tons loaded and the cycle time.

» METER READING SERVICE

Daily advance of the hours of the equipment which allows to project maintenance and replacement of components.

» REPORTING

Together with the Distributor, condition reports and operational practices can be defined to ensure correct equipment performance.

» FUEL CONSUMPTION

Daily average in Lt / h.

Check with your Komatsu dealer for the information available for your model and service availability in your country.



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request.

Komatsu, and related logo are trademarks of Komatsu Ltd. or one of its affiliates.

© 2017 Komatsu Ltd. or one of its affiliates. All rights reserved.



For further information, contact your distributor or visit our website www.komatsulatinamerica.com

KLAT-EQ009 / 01-2017

